


## Schedule A

# **Approach - Design / Construct Standards**

### **Typical Plan View**

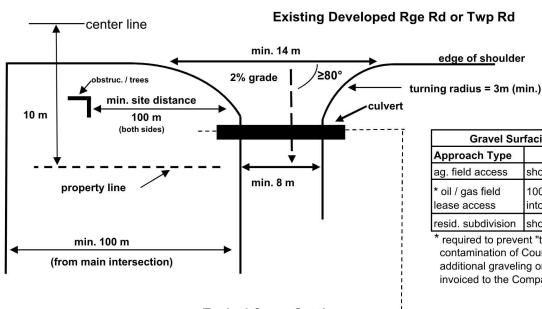

#### **Gravel Surfacing Requirements** Length Approach Type ag. field access shoulder edge to property oil / gas field 100 m from shoulder edge into lease road lease access


shoulder edge to property

edge of shoulder

resid. subdivision

required to prevent "tracking" and contamination of County roadway, additional graveling or cleanup will be invoiced to the Company at cost

# **Typical Cross Section**

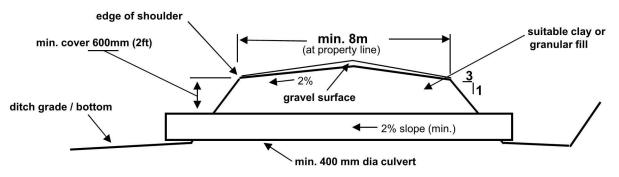

Required Culvert Length	
length (m)	cover (mm)
13 (min.)	400 (min.)
14	600
16	800

### note:

- 1. the length of culvert required will vary with the depth of cover (see table)
- 2. if there is an option to select the location of the approach, the requirement for a culvert may be avoided if a high point in the ditch grade is chosen
- 3. the minimum width of the approach is intended for typical machinery access, the width equipment may have to be increased to suit larger industrial equipment (ie: service rig)